

Standard Direct + Standard Indirect Cylinders

120, 150, 170, 200, 250 + 300*



Specification	
Finish	Grey
Dimensions	See following page
Weight	See following page
Capacity	Available in sizes up to 300 litres. See following page
Features	
Material	Highly corrosion resistant duplex stainless steel
Fittings	Compression fittings included as standard
Heating Element	Corrugated heating coil

Key Features + Benefits

25

Year Vessel Guarantee

2

Year Parts Guarantee

Proven Technologies

Mains Pressure Hot Water

40mm Insulation

Direct + Indirect Models

Manufactured in the UK


Certifications + Accreditations

Technical Data Sheet | Cylinders


www.instinctproducts.co.uk

Standard Direct + Standard Indirect Cylinders
120, 150, 170, 200, 250 + 300*

Standard Direct

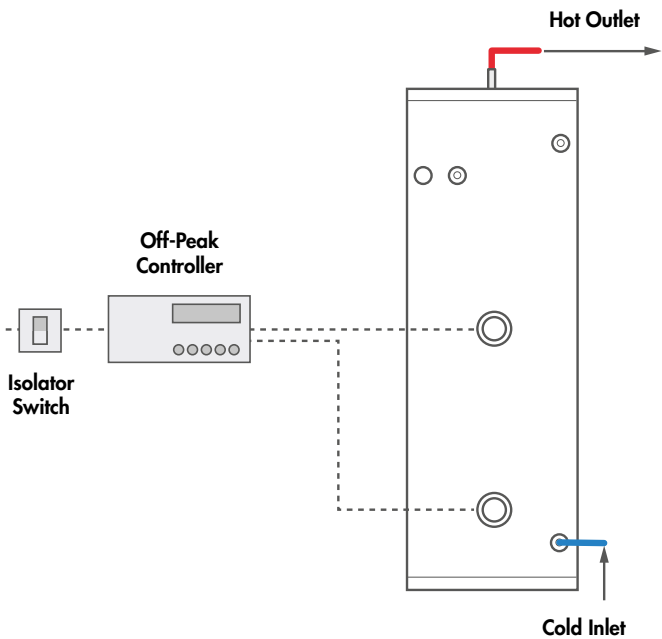

Standard Indirect

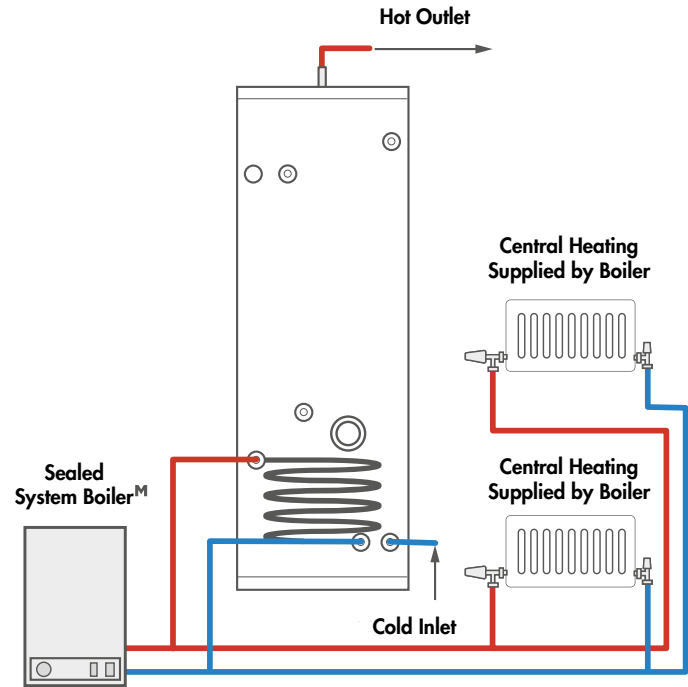

Standard Direct							
	ErP Rating	Heat Loss	Heat Loss	Capacity	Height	Diameter	Weight
IDEINSDR120	C	43 Watts	1.03 kWh/24h	118 Litres	832mm	530mm	19kg
IDEINSDR150	C	52 Watts	1.24 kWh/24h	149 Litres	1012mm	530mm	22kg
IDEINSDR170	C	57 Watts	1.37 kWh/24h	169 Litres	1131mm	530mm	24.3kg
IDEINSDR200	C	65 Watts	1.56 kWh/24h	198 Litres	1305mm	530mm	27kg
IDEINSDR250	C	79 Watts	1.89 kWh/24h	248 Litres	1603mm	530mm	33.3kg
IDEINSDR300	C	86 Watts	2.06 kWh/24h	287 Litres	1990mm	530mm	41kg

Standard Indirect							
	ErP Rating	Heat Loss (Watts)	Heat Loss	Capacity	Height	Diameter	Weight
IDEINSIN120	B	43 Watts	1.03 kWh/24h	118 Litres	832mm	530mm	19.5kg
IDEINSIN150	B	52 Watts	1.24 kWh/24h	149 Litres	1012mm	530mm	23.3kg
IDEINSIN170	B	57 Watts	1.37 kWh/24h	169 Litres	1131mm	530mm	26kg
IDEINSIN200	C	65 Watts	1.56 kWh/24h	198 Litres	1305mm	530mm	28.5kg
IDEINSIN250	C	79 Watts	1.89 kWh/24h	248 Litres	1603mm	530mm	35kg
IDEINSIN300	C	92 Watts	2.20 kWh/24h	295 Litres	1895mm	530mm	41kg